

Stainless Steel Mini Ball Valve

Screwed BSPP, Reduced Bore, CF8M Stainless Steel Body, PTFE Seats, Viton O-rings, Short Lever




Pressure / Temperature Specifications	
Pressure	PN63
Temperature	-10°C to 180°C

Material Specifications		
1	O-ring	Viton
2	Stem	304 Stainless Steel
3	Bolt	304 Stainless Steel
4	Lever	Aluminium Alloy
5	Body	CF8M Stainless Steel
6	Cap	CF8M Stainless Steel
7	Ball Seat	RPTFE
8	Ball	CF8M Stainless Steel
9	Ball Seat	RPTFE
10	Thrust Washer	PTFE

LV 6101 Dimensions							
Size	D	L	H	W	B	Nm	Kg
1/8"	7	39	26.5	22.8	21	3.4	0.1
1/4"	7	42	26.5	22.8	21	3.4	0.1
3/8"	7	42	26.5	22.8	21	3.4	0.1
1/2"	9.2	46	28.3	22.8	24.5	4.5	0.1

LV 6102 Dimensions									
Size	D	L	H	W	B	E	A	Nm	Kg
1/8"	7	40	26.5	22.8	21	7	10	3.4	0.1
1/4"	7	40	26.5	22.8	21	7	10	3.4	0.1
3/8"	7	40	26.5	22.8	21	12	10	3.4	0.1
1/2"	9.2	46	28.3	22.8	24.5	14.5	12	4.5	0.1

LV 6101

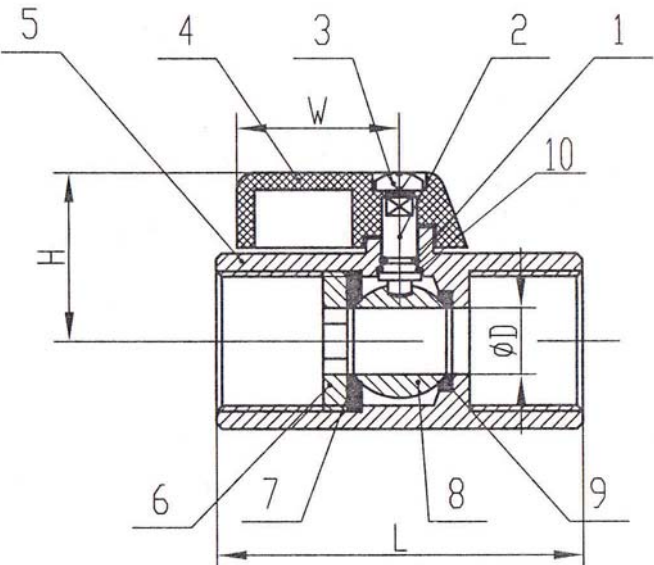

LV 6102

