

Stainless Steel Gate Valve - BSPP


Screwed BSPP, CF8M Stainless Steel Body, Bonnet & Wedge, Non-rising Stem, Handwheel Operation



Pressure / Temperature Specifications

Pressure	200psi
Temperature	-20°C to 176°C

Pressure/Temperature Chart

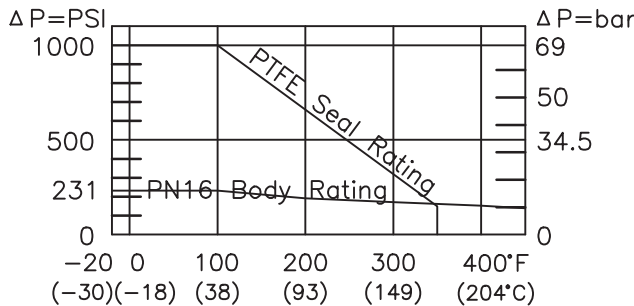

Material Specifications

1	Body	CF8M Stainless Steel
2	Disc	CF8M Stainless Steel
3	Bonnet	CF8M Stainless Steel
4	Gasket	PTFE
5	Whorl Gasket	304 Stainless Steel
6	Packing	PTFE
7	Gland	304 Stainless Steel </td
8	Cap Nut	CF8M Stainless Steel
9	Stem	316 Stainless Steel
10	Handle	Aluminium
11	Nameplate	Aluminium
12	Nut	304 Stainless Steel

Dimensions

Size	d	L	H	W	Kg
1/2"	15	55	101	70	0.42
3/4"	20	60	108	70	0.52
1"	25	65	115	80	0.70
1 1/4"	32	75	132	80	1.01
1 1/2"	38	85	149	90	1.54
2"	50	95	175	100	2.06
2 1/2"	65	116	213	140	5.56
3"	80	130	241	140	8.63

