


## Ball Check Valve – Standard Ball

Ball Check Valve, Cast Iron Body & Bonnet, NBR Seat, Phenolic Resin Ball 1 to 2½", NBR Coated Aluminium Ball 3", Screwed BSPP.

### Pressure/Temperature Ratings


Pressure	PN10 Rated
Temperature	-10°C to 70°C

### Pressure Drop

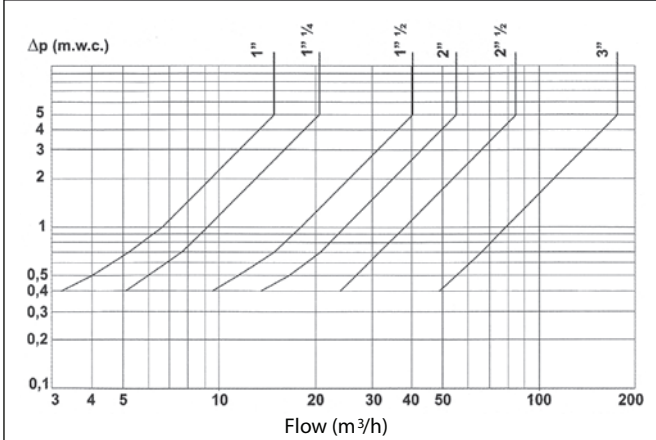

### Material List

Body	GG-25 (EN-GJL-250)
Bonnet	GG-25 (EN-GJL-250)
Ball	NBR Coated Aluminium
Seal Gasket	Elastomer/NBR
Bonnet Gasket	Elastomer/NBR
Bolting	Stainless Steel

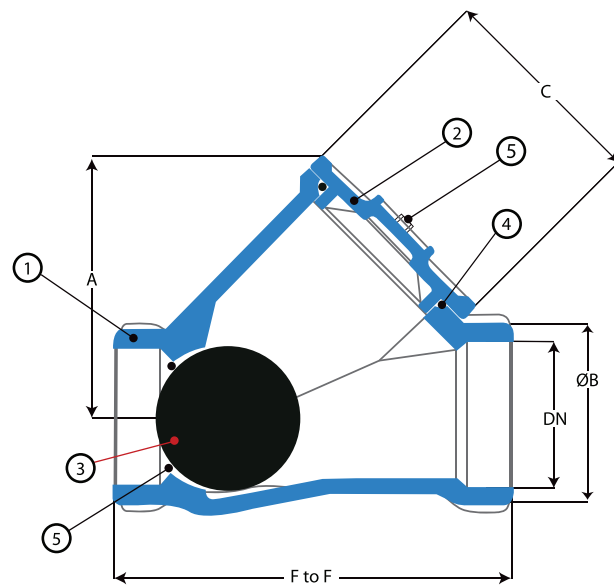

### Dimensions

Size	A	ØB	C	F to F	Kv	Kg	Cracking Pressure (mm.w.c)	
							↑	→
1"	85	57	110	141	21	2.2	24.0	0.00
1¼"	85	57	110	141	29	2.2	14.6	0.00
1½"	90	64	120	150	57	2.8	16.0	0.00
2"	115	77	140	175	78	3.9	21.0	0.00
2½"	135	95	155	214	120	65	22.3	0.00
3"	160	108	185	248	250	8.1	67.0	0.00