

Brass Spring Check Valve

Screwed BSPP, Opening Pressure 0.02 Bar, NBR Gasket
 Female x Male = **LV 2275** Male x Female = **LV 2277**




Pressure / Temperature Specifications


Pressure	1/2" to 1"	PN16
	1 1/4"	PN10
Temperature	0°C to 95°C (-20°C to 110°C Peak)	

Material Specifications

1. Body	CW617N Brass
2. Disc	POM (Acetal Copolymer)
3. Gasket	NBR
4. Spring	AISI 302 Stainless Steel

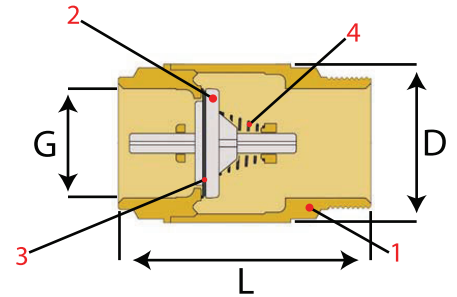

LV 2275

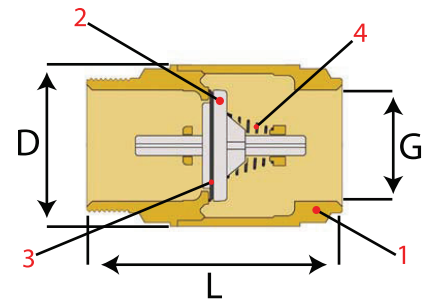

LV 2277

LV2275 Dimensions

G	D	L	Kg
1/2"	30	53	0.11
3/4"	37	58	0.17
1"	44	65	0.26
1 1/4"	56	73	0.45

LV2277 Dimensions

G	D	L	Kg
1/2"	30	54	0.12
3/4"	37	60	0.19
1"	44	67	0.27
1 1/4"	56	77	0.45

KV Values

Size	Kv
1/2"	4.0
3/4"	8.0
1"	10.3
1 1/4"	18.0

Pressure Drop Chart

