


Brass Ball Valve - Screwed BSPT - Locking Lever

Screwed BSPT, Nickel Plated Brass Body, PTFE Seat, Yellow (LV2312) or Red (LV2318) PVC Coated Steel Lever

Pressure/Temperature Specifications	
Pressure	PN25 ¼" & ⅜"
	PN40 ½" to 1"
	PN25 1¼" to 2"
	PN16 2½" to 4"
Temperature	-20°C to 110°C

Material Specifications	
1. Body	Nickel Plated Brass
2. Bonnet	Nickel Plated Brass
3. Seat	PTFE
4. Ball	Chrome Plated Brass
5. Stem	Brass
6. O-ring	NBR
7. Nut	Nickel Plated Brass
8. Handle	PVC Coated Steel

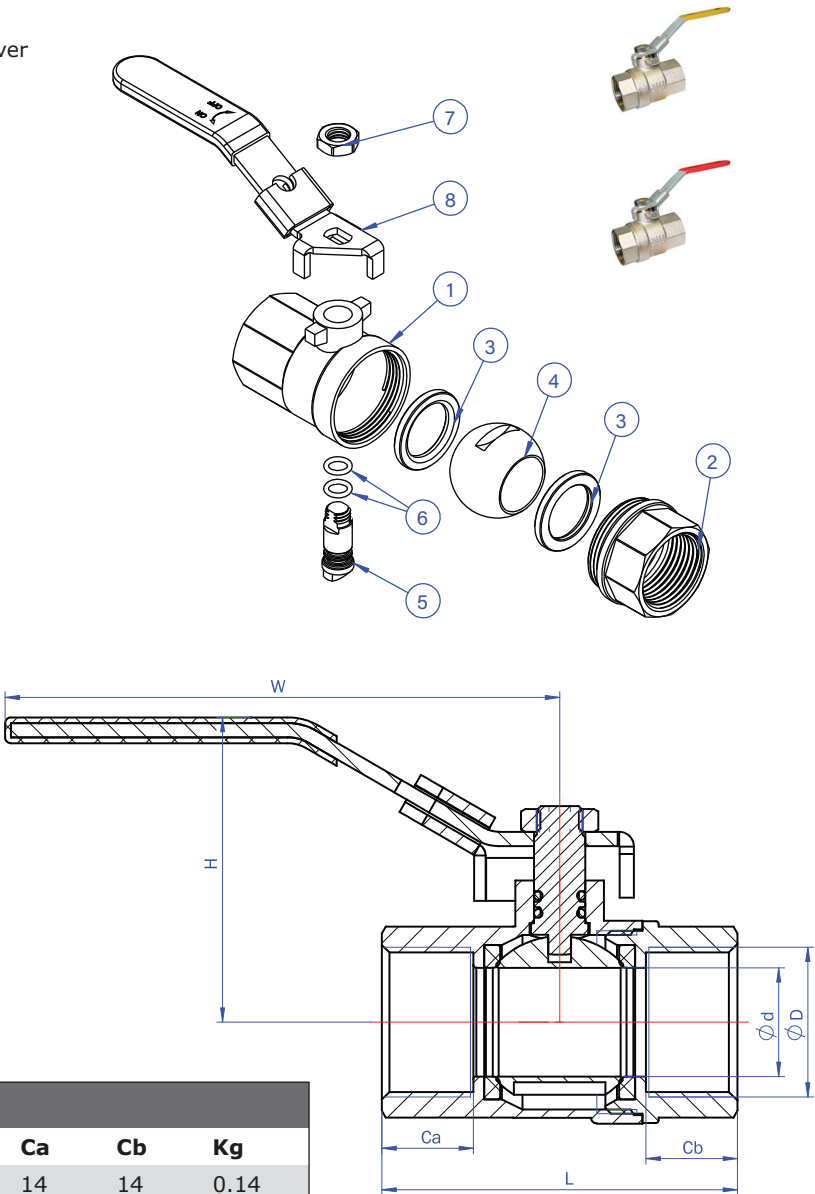

Dimensions							
Size ØD	Ød	L	H	W	Ca	Cb	Kg
¼"	9	49	44	97	14	14	0.14
⅜"	12	56	46	97	16.5	16.5	0.17
½"	15	59	50	97	17	16.5	0.2
¾"	19	62	53	97	16	16	0.26
1"	23	72	61	114	18	18	0.43
1¼"	29	83	73	128	19	19	0.65
1½"	38	101	79	128	23	23	1.0
2"	47	105	90	202	20	20	1.5
2½"	64	153	135	248	33.5	33.5	3.8
3"	75	170	142	248	35	35	5.0
4"	97	205	159	248	42.5	42.5	8.2