

Brass Mini Ball Valve



LV 4002

Screwed BSPP Female x Female, Polished Chrome Plated Finish, Reduced Bore, Short Handle



Pressure / Temperature Specifications


Pressure	PN16
Temperature	-10°C to 90°C

Material Specifications

Body	Nickel Plated Brass
Sleeve	Brass
Ball	Nickel Plated Brass
Seat	PTFE
Stem O-ring	NBR
Handle	Glass Fibre Reinforced Nylon

Dimensions

DN	A	B	C	D	G	E	F	Kg
1/8"	9	9	39	6	21	27	22	0.08
1/4"	9	9	39	8	21	27	22	0.09
3/8"	10	9	42	8	21	27	22	0.07
1/2"	10.5	10.5	47	10	25	29	22	0.1
3/4"	13.5	13.5	54	12	30	31.5	22	0.17

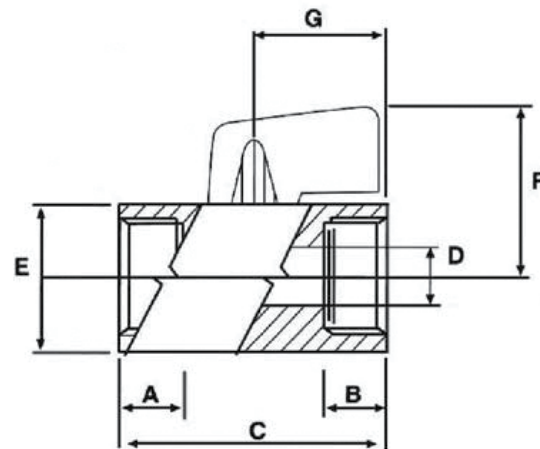

All information is sourced from our manufacturer's data and is intended for guidance only - Leengate Valves can accept no liability for changes, omissions or errors.