

Brass Ball Valve - Standard Pattern



LV 4330

Screwed BSPT Male x BSPP Female 1/4" & 3/8", Screwed BSPP Male x BSPP Female 1/2" to 4", Nickel Plated Body, Full Bore, Red Aluminium Lever



Pressure / Temperature Specifications



Pressure	PN64 1/4" & 3/8"
	PN40 1/2"
	PN32 3/4" & 1"
	PN25 1 1/4" to 2 1/2"
	PN16 3" & 4"
Liquid Temperature	-20°C to 110°C

Material Specifications


1.	Body	Nickel Plated Brass CW 617 N
2.	Body End	Nickel Plated Brass CW 617 N
3.	Ball	Chrome Plated Brass CW 617 N
4.	Seat	PTFE
5.	O-ring	NBR
6.	Stem	Brass CW 614 N
7.	Lever	Aluminium
8.	Screw	Zinc Plated Steel

Dimensions

Size	Ø	H	S	L	F	Kg
1/4"	10	46	51	80	12	0.12
3/8"	10	48	53	80	14	0.13
1/2"	14.5	50	55	80	13	0.15
3/4"	19	57	65	90	14	0.26
1"	24	60	77	90	17	0.38
1 1/4"	30.5	73	87	120	17	0.56
1 1/2"	37	86	101	135	19	0.88
2"	47	98	117	160	21	1.43
2 1/2"	60	110	136	160	30	2.17
3"	75	148	157	265	33	3.65
4"	94	163	189	265	40	6.11

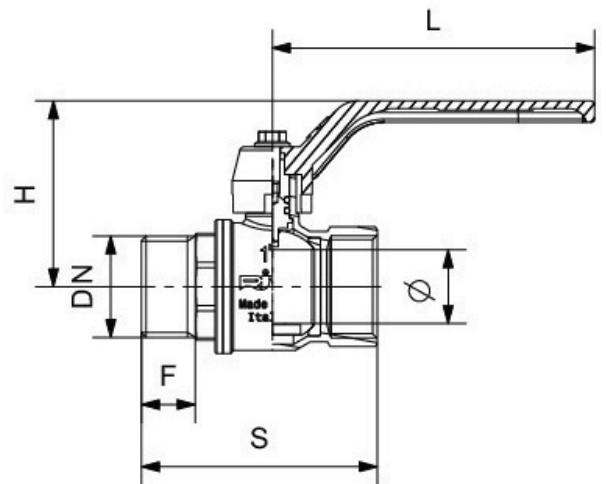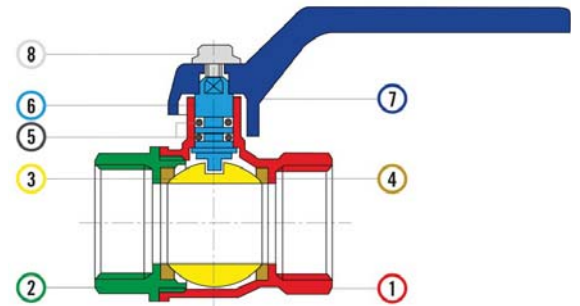

Pressure Loss Chart

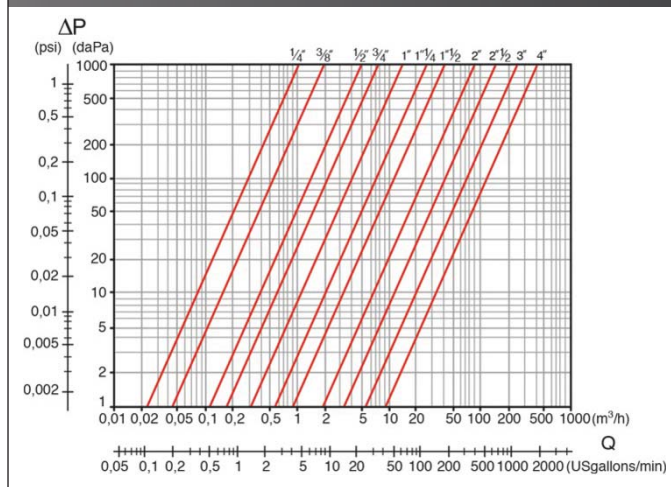

Pressure / Temperature Chart

