

Brass Ball Valve - 3 Way - Rotating Flanges - ISO Top

Steel Plated Rotating Flanges to fit PN16, ISO 5211 for Direct Mount,
Nickel Plated Brass Body, Reduced Bore



LV4512T = T Port

LV4514L = L Port


Pressure / Temperature Specifications

Pressure	PN16
Temperature	-10°C to 100°C

Material Specifications

Body	Nickel Plated Brass
Ball	Chrome Plated Brass
Seat	PTFE
Stem	Brass
Seat O-ring	NBR
Gland Washer	PTFE
Sleeve	Brass
Stem O-ring	NBR
Mounting Plate	Brass
Thrust Washer	PTFE
Nut	Brass
Gland	Brass
Union	Brass
Union O-ring	NBR
Flanges	Steel

Head Loss Chart

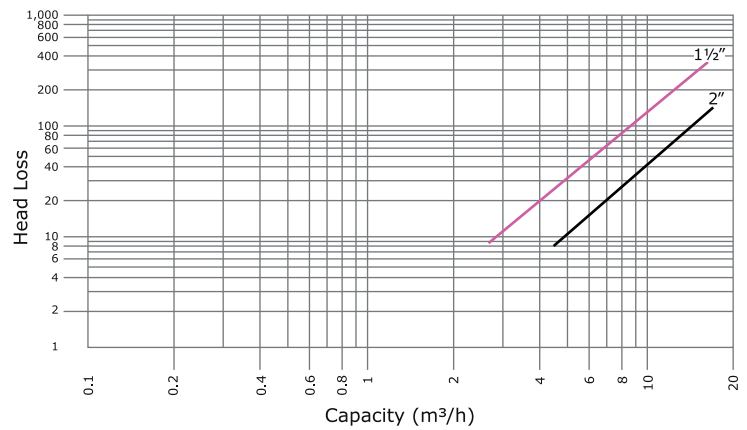

Dimensions

DN	L	L1	L2	Ø	H	E	Q	ISO	Nm	Kv	Kg (T)	KG (L)
1½"	187	93.5	115.5	32	73	12	11	F05	8.0	24.97	11.0	10.1
2"	215	107.5	107.5	40	80	12	11	F05	9.0	45.09	14.26	14.25
2½"	241	120.5	120.5	50	90.5	12	14	F04	12.0	TBC	18.23	18.05

