

# Ductile Iron Gate Valve



Complies with BS5163, Flanged PN10/16, Handwheel Operation


## Pressure/Temperature

Pressure	PN16 Rated
Temperature	-10°C to 70°C

Size	2"	2½"	3"	4"	5"	6"	8"
L	178	191	203	229	254	267	292
H	240	255	280	305	373	417	525
D	175	175	255	255	250	305	305

## Materials

Body	Ductile Iron
Bonnet	Ductile Iron
Wedge	Ductile Iron with EPDM Coating
Thrust Collar	Brass
Stem Nut	Brass
Stem	Stainless Steel
O-ring	EPDM
Gasket	EPDM
Gland	Ductile Iron
Wrench Nut	Ductile Iron
Handwheel	Ductile Iron

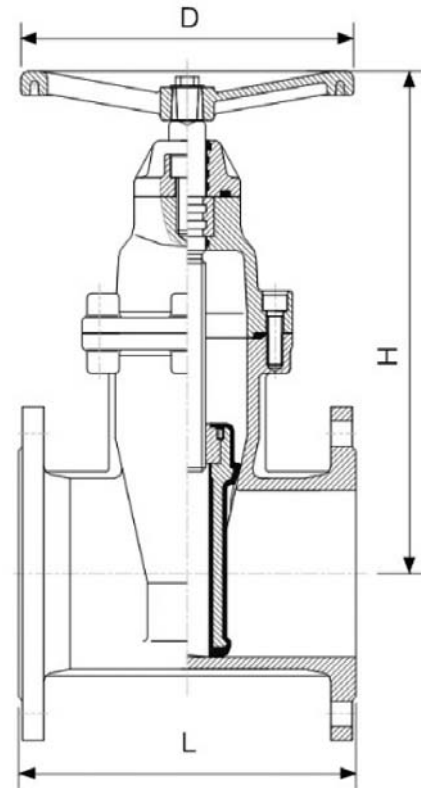

Note: Cap Top versions available

Note: 10" & 12" also available\*, contact Sales for technical info

\*not WRAS approved