

Cast Iron Float Valve - Flanged PN16 - Straight Pattern

Flanged PN16, Cast Iron Body & Bonnet, Epoxide Float, Stainless Steel Stem & Disc, Straight Pattern



Pressure / Temperature Specifications

Pressure	PN10
Temperature	-10°C to 90°C


Material Specifications

1. Body	EN GJL 250 Cast Iron
2. Cover	EN GJL 250 Cast Iron
3. Disc	X20Cr13 Stainless Steel
4. Stem	X20Cr13 Stainless Steel
5. Disc Gasket	EPDM
6. Packing Ring	EPDM
7. Hexagon Bolt	Steel
8. Lever	Zinc Coated S235JR Steel
9. Float	Epoxy Coated S235JR Steel
10. Piston Sleeve	CuZn39Pb2

Dimensions

DN	L	A	B	C	H1	Hp	Dp	Kv	D	K	n x d	Kg
2"	230	35	700	15	175	200	350	39.8	165	125	4 x 19	20.0
2½"	290	45	700	15	221	250	400	72.8	185	145	4 x 19	26.0
3"	310	55	800	15	249	250	400	99.3	200	160	8 x 19	32.5
4"	350	71	975	25	260	300	400	158.3	220	180	8 x 19	47.0
5"	400	87	1190	25	320	300	500	243.1	250	210	8 x 19	69.0
6"	480	102	1305	25	385	300	500	327.6	285	240	8 x 23	98.0
8"	600	138	1590	25	420	400	500	579.9	340	295	8 x 23	149.0

DN 25-80

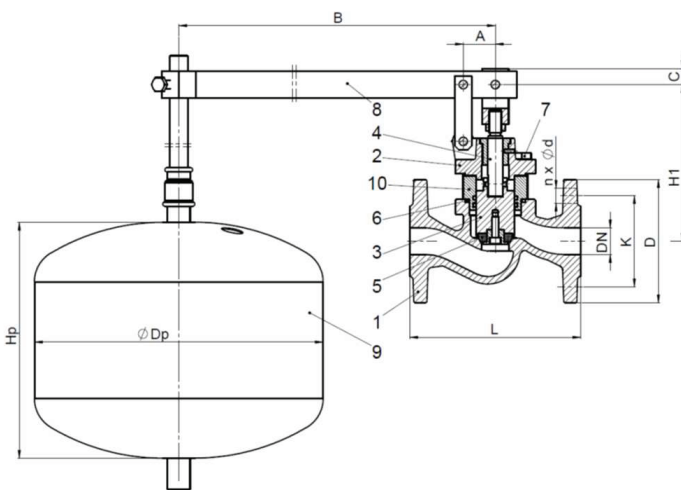

DN 100-200

