

# Brass Ball Valve - 3 Way Diverter - 180° Operation

Screwed BSPP, Nickel Plated Body, Full Bore, 180° Operation, Top Lever Operated



**LV5330T = T Port**

**LV5331L = L Port**


### Pressure / Temperature Specifications

Pressure	PN25
Temperature	-10°C to 100°C


### Material Specifications

1. Body	Nickel Plated CW617N Brass
2. Ball	Chrome Plated CW614N Brass
3. Seat	PTFE
4. Stem	CW614N Brass
5. Gasket	PTFE
6. O-ring	Viton
7. Nut	Zinc Plated CB4FF Steel
8. Nut	CW614N Brass
9. Sleeve	Nickel Plated CW617N Brass
10. Lever	Red Painted DD13 Steel
11. Flux Indicator	SGALSI Steel

180° Rotation

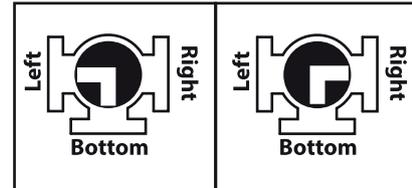


180° Rotation

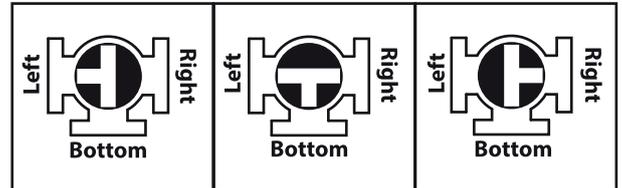


### Dimensions

DN	L	Ø1	Ø2	P	H1	H2	M	Kv	Kg
¼"	53	10	10	14	48	31	92	2.55	0.36
⅜"	53	10	10	14	48	30.5	92	2.75	0.34
½"	54.5	12	12	14	48	30.5	92	3.67	0.31
¾"	66.5	18	20	16	50	34.5	92	10.19	0.43
1"	74.5	23	25	17	55	38	115	12.74	0.61
1¼"	85	30	32	18	68	46	150	19.65	1.02
1½"	97	37	39	19	73	53	150	33.14	1.5
2"	109	46	48	21	79	62.5	150	51.07	2.4
3"	177	80	80	25	129	155	240	TBC	7.7

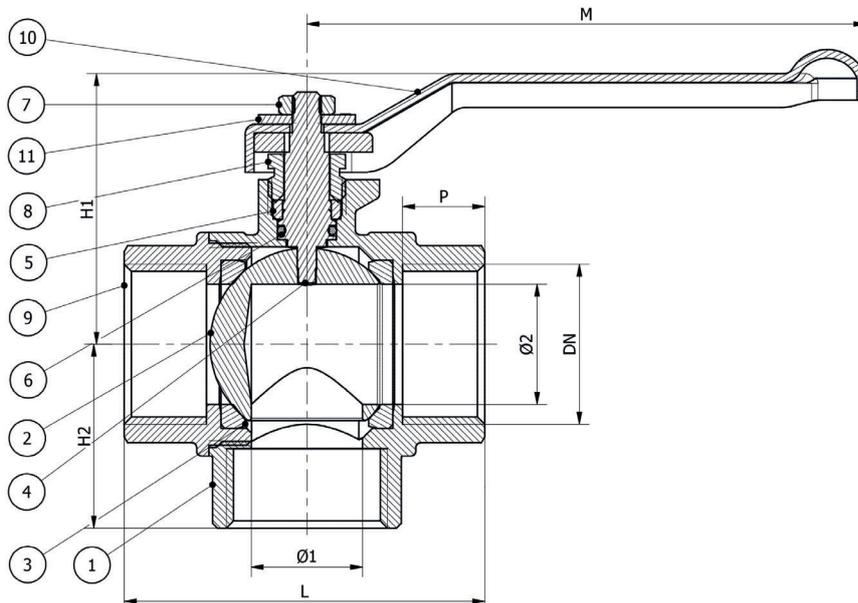

# Brass Ball Valve - 3 Way Diverter - 180° Operation

LV 5330 T / LV 5331 L

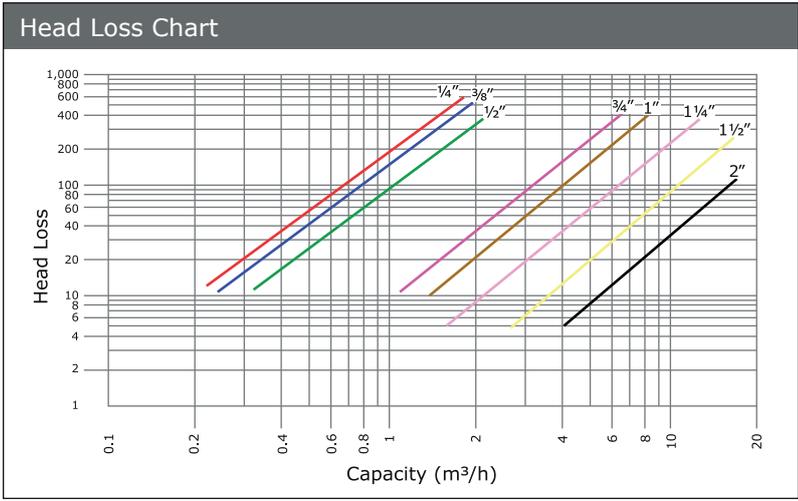

Last updated 25/02/2021