

Ductile Iron Ball Valve - Flanged PN40 - Direct Mount


LV 5547

ISO 5211 for Direct Mount, Flanged PN40, Ductile Iron Body ½" to 3", Carbon Steel Body 4",
Stainless Steel Ball & Stem, PTFE Seats, Lever Operated.




Pressure / Temperature Specifications	
Pressure	PN40
Temperature	-20°C to 200°C

Materials		
1.	½" to 3" Body	GGG40 Ductile Iron
1.	4" Body	A105 Carbon Steel
2.	Ball	304 Stainless Steel
3.	Stem	420 Stainless Steel
4.	Seats	PTFE
5.	O-ring	PTFE
6.	Handle	Forged Aluminium

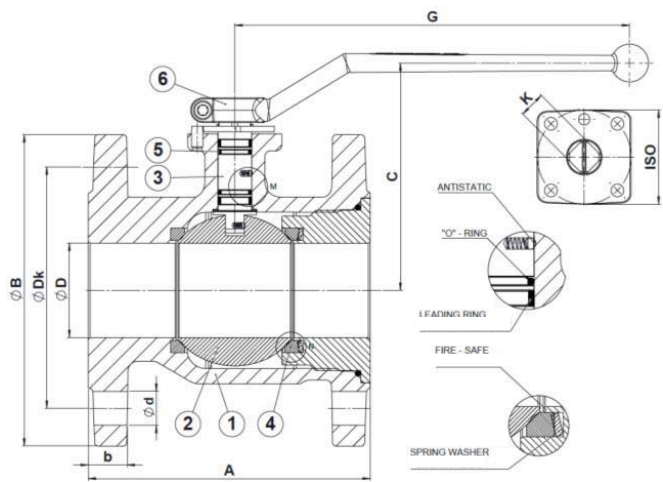

½" to 2"

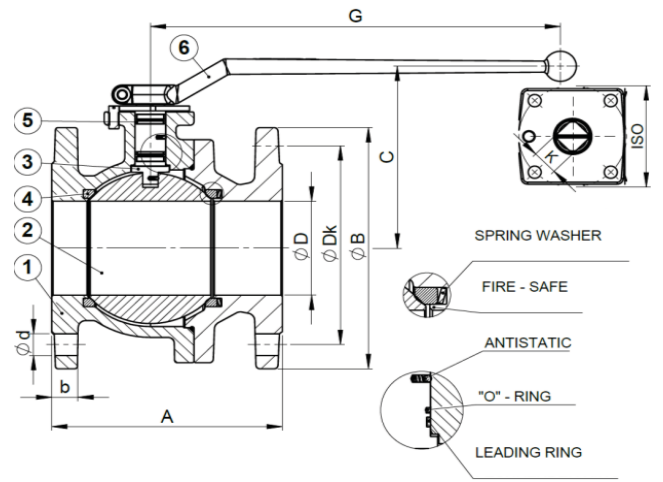

2½" to 4"

Dimensions												
DN	A	ØB	C	ØD	G	b	ØDk	Ød	No.	ISO	K x h	Kg
½"	115	95	72	13	150	16	65	14	4	F04	11 x 13.5	2.0
¾"	120	105	82	19.5	150	18	75	14	4	F04	11 x 13.5	3.3
1"	125	115	83	25	150	18	85	14	4	F04	11 x 13.5	3.6
1¼"	130	140	102	32	210	18	100	18	4	F04	14 x 18	5.4
1½"	140	150	107	40	210	18	110	18	4	F05	14 x 18	6.9
2"	150	165	120.5	50	210	20	125	18	4	F05	14 x 18	8.9
2½"	170	185	140	63.5	320	18	145	18	8	F07	17 x 23	14.7
3"	180	200	151	78	320	20	160	18	8	F07	17 x 23	20.1
4"	190	235	166	99	445	20	190	22	8	F07	17 x 23	26.0