

Stainless Steel Mini Ball Valve

Screwed BSPP, Reduced Bore, Stainless Steel Body, Ball & Stem, RTFE Seats, Viton
Seals, Anti-blowout Stem, Butterfly Handle





LV 6101 - Male x Female **LV 6102** - Female x Female


Pressure/Temperature Specifications	
Pressure	PN63
Temperature	-29°C to 180°C

Material Specifications	
1. Body	1.4408 Stainless Steel
2. Cap	1.4408 Stainless Steel
3. Ball	AISI 316 Stainless Steel
4. Stem	AISI 316 Stainless Steel
5. Seat	15% R-PTFE
6. Seat	15% R-PTFE
7. Thrust Washer	PTFE
8. O-ring	Viton
9. Bolt	AISI 304 Stainless Steel
10. Handle	Aluminium

Dimensions						
Size	Ød	L	W	H	B	Kg
1/8"	7.0	39	22.8	26.5	21	0.1
1/4"	7.0	40	22.8	26.5	21	0.1
3/8"	7.0	40	22.8	26.5	21	0.1
1/2"	9.2	46	22.8	28.3	24.5	0.11

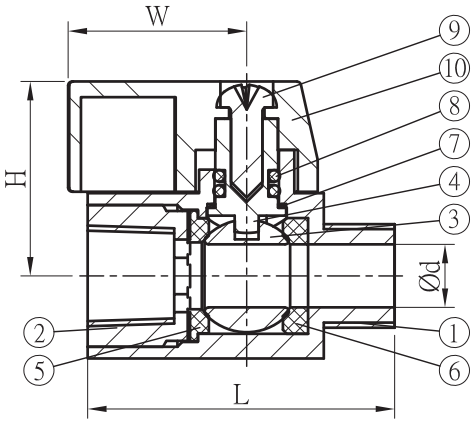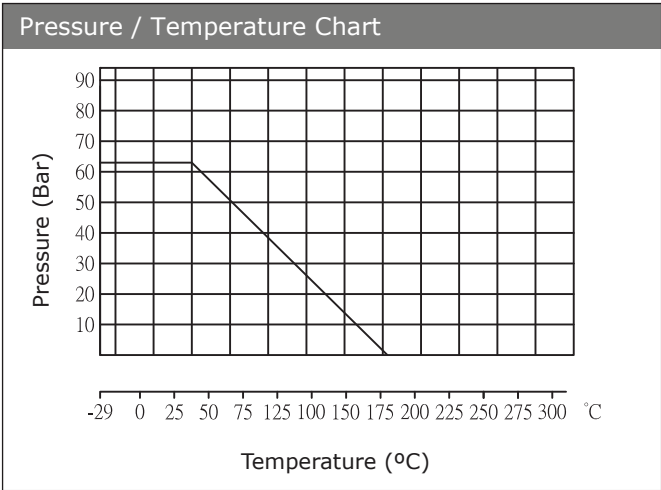

LV 6101

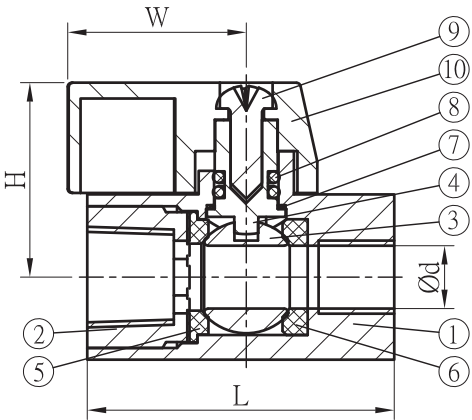

LV 6102

Torque (Nm, without Safety)	
Size	Nm
1/8"	4.0
1/4"	4.0
3/8"	4.0
1/2"	5.0