

# Stainless Steel Ball Valve - Two Piece

LV 6205


Screwed BSPP, Full Bore, CF8M Stainless Steel Body, Ball & Stem, PTFE Seats & Seals, Anti-blowout Stem, Butterfly Handle.



Pressure / Temperature Specifications	
Pressure	PN63
Temperature	-10°C to 180°C

Material Specifications		
1.	Body	CF8M Stainless Steel
2.	Cap	CF8M Stainless Steel
3.	Ball	CF8M Stainless Steel
4.	Seat	PTFE
5.	Joint Gasket	PTFE
6.	Stem	AISI 316 Stainless Steel
7.	Thrust Washer	PTFE
8.	Stem Packing	PTFE
9.	Gland Nut	AISI 304 Stainless Steel
10.	Handle	AISI 430 Stainless Steel
11.	Spring Washer	AISI 304 Stainless Steel
12.	Stem Nut	AISI 304 Stainless Steel
13.	Handle Cover	Plastic

Torque	
Size	Nm
1/4"	4.0
3/8"	4.0
1/2"	5.0
3/4"	8.0
1"	10.0

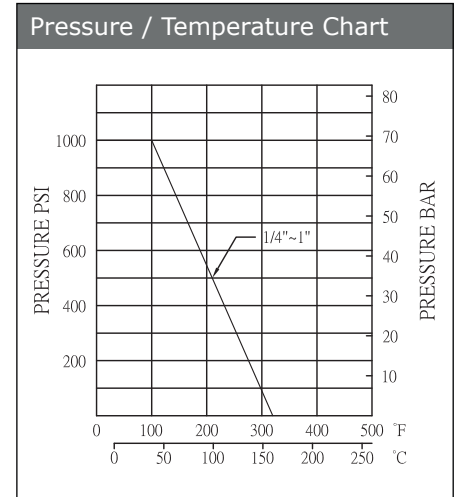

Dimensions												
Size	d	L	H	W	S	S1	X	N	P	BL	E	Kg
1/4"	11.6	50	49	98	15.5	9.5	5.0	12.5	28.5	M8	17	0.22
3/8"	12.5	50	49	98	15.5	9.5	5.0	12.5	28.5	M8	21	0.22
1/2"	15	60	53	98	15.5	11	5.0	12.5	28.5	M8	25	0.29
3/4"	20	65	63	120	17.6	12	5.8	21	34.8	M8	31	0.42
1"	25	80	72	154	21	14.5	7.0	22.5	34.8	M10	38	0.71

