

Stainless Steel Ball Valve - Wafer to suit PN16



LV 6340

Wafer to suit PN16, Full Bore, Stainless Steel Body, Ball & Stem,
PTFE Seats, Anti-blowout Stem, Anti-static Device.







Pressure/Temperature Specifications

Pressure	PN40 ½" to 2"
	PN16 2½" to 4"
Temperature	-29°C to 180°C

Material Specifications

1. Body	1.4408 Stainless Steel
2. Cap	1.4408 Stainless Steel
3. Ball	1.4408 Stainless Steel
4. Seat	PTFE
5. Stem	316 Stainless Steel
6. Gasket	PTFE
7. Thrust Washer	TFM4215
8. O-ring	Viton
9. Packing	PTFE
10. Gland	304 Stainless Steel
11. Belleville Washer	301 Stainless Steel
12. Gland Flange	1.4308 Stainless Steel
13. Stopper	304 Stainless Steel
14. Snap Ring	304 Stainless Steel
15. Handle	304 Stainless Steel
16. Bolt	304 Stainless Steel
17. Bolt	304 Stainless Steel
18. Nut	304 Stainless Steel
19. Handle Sleeve	Plastic

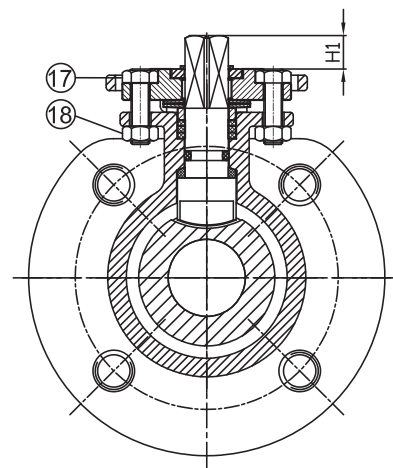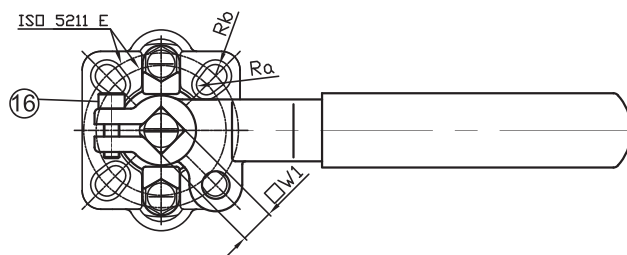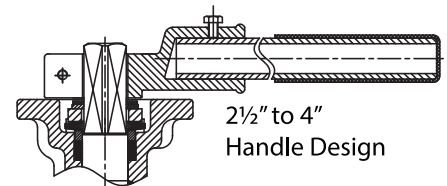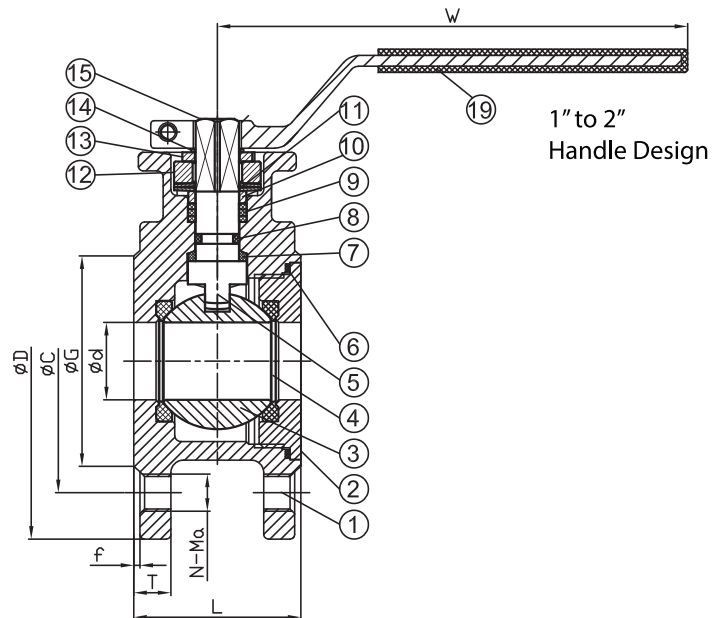


Dimensions

Size	d	D	C	G	f	T	N-Ma	L	H1	W	W1	ISO	E	Ra	Rb	Kg
1"	25	115	85	68	2	18	4-M12	54	11	153	11	F04-F05	42-50	6.5	7.5	3.0
1½"	38	150	110	88	3	18	4-M16	62	14	183	14	F05-F07	50-70	7.5	9.5	4.0
2"	50	165	125	102	3	20	4-M16	72	14	183	14	F05-F07	50-70	7.5	9.5	5.35
2½"	65	185	145	122	3	18	4-M16	94	17	352	17	F07-F10	70-102	9.5	11.5	9.2
3"	76	200	160	138	3	20	8-M16	118	17	352	17	F07-F10	70-102	9.5	11.5	13.5
4"	96	220	180	158	3	20	8-M16	140	22	397	22	F10-F12	102-125	11.5	13.5	19.3

Stainless Steel Ball Valve - Wafer to suit PN16

LV 6340

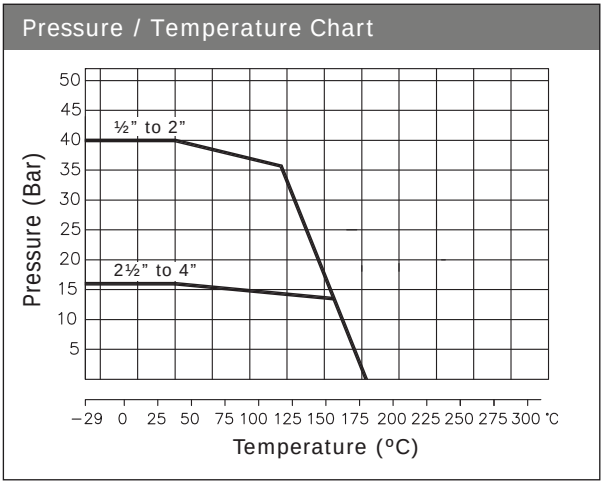

Last updated 22/07/2025