


Stainless Steel 3 Way Ball Valve

LV 6400 T & LV 6411 L

ISO 5211 for Direct Mount, Screwed BSPT, Reduced Bore, Stainless Steel Body, Ball & Stem, PTFE Seats & Seals.

Pressure / Temperature Specifications	
Pressure	PN63 ¼" to 1"
	PN50 1¼" to 2"
	PN40 2½" & 3"
Temperature	-29°C to 180°C

Material Specifications	
Part	Material
1. Bonnet	CF8M Stainless Steel
2. Seat	PTFE
3. Ball	316 Stainless Steel
4. Gasket	PTFE
5. Body	CF8M Stainless Steel
6. Anti-static Device	304 Stainless Steel
7. Stem Gasket	PTFE
8. Stem	316 Stainless Steel
9. Butterfly Spring	304 Stainless Steel
10. Thrust Washer	304 Stainless Steel
11. Indicator	304 Stainless Steel
12. Stem Nut	304 Stainless Steel
13. Handle Lock	304 Stainless Steel
14. Handle	304 Stainless Steel
15. Packing Gland	304 Stainless Steel
16. Packing	PTFE
17. O-ring	Viton

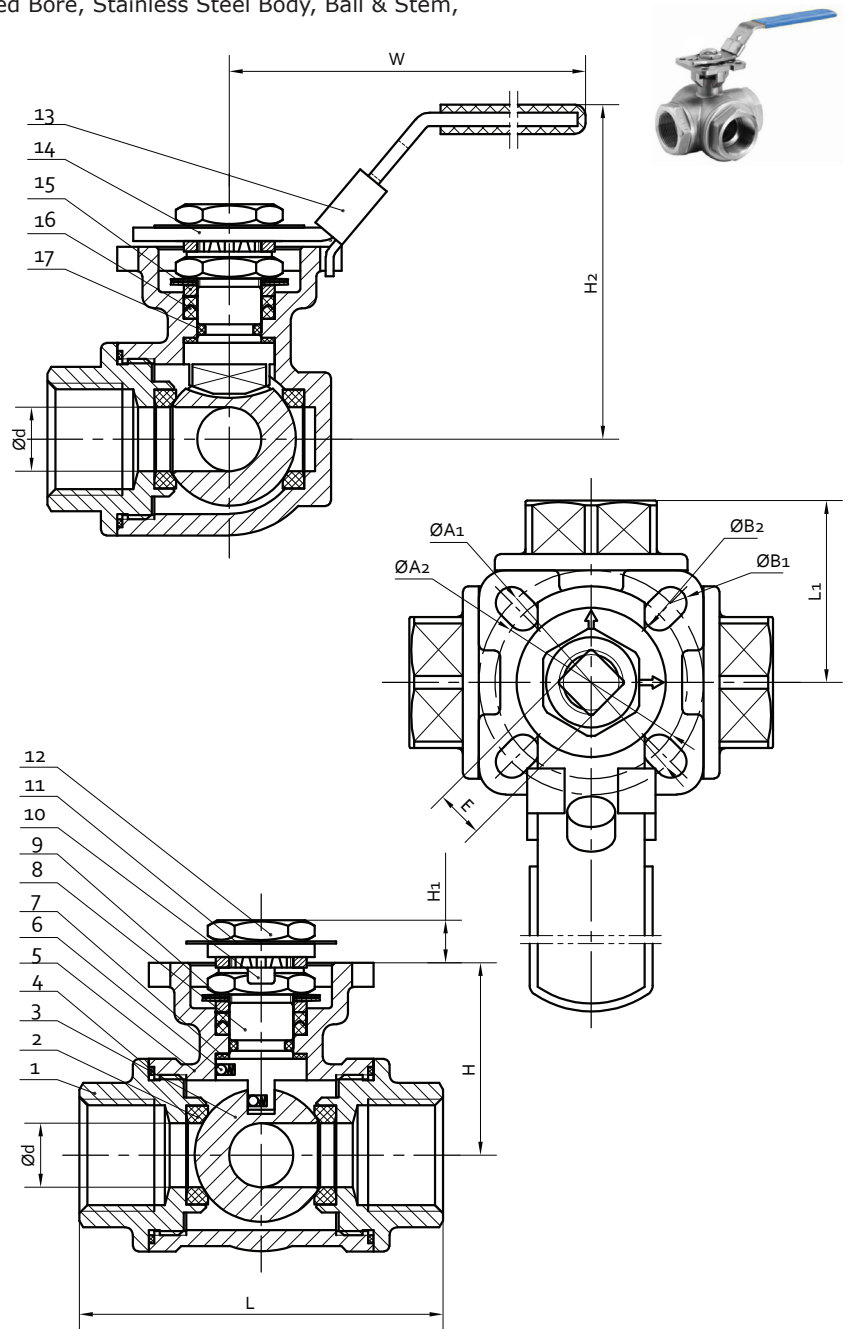


Dimensions												
Size	Ød	L	L1	H	◇E	W	ØA1	ØA2	ØB1	ØB2	ISO	Kg
¼"	8	65	32.5	8	9	125	42	36	6	6	F03/F04	0.75
⅜"	10	65	32.5	8	9	125	42	36	6	6	F03/F04	0.71
½"	12	68	34	8	9	125	42	36	6	6	F03/F04	0.7
¾"	15	75	37.5	8	9	125	42	36	6	6	F03/F04	1.07
1"	18	85	42.5	10	11	153	50	42	6	7	F04/F05	1.7
1¼"	25	110	55	10	11	153	50	42	6	7	F04/F05	2.56
1½"	32	125	62.5	14	14	195	70	50	7	9	F05/F07	3.82
2"	38	145	72.5	14	14	195	70	50	7	9	F05/F07	5.73
2½"	50	165	82.5	17	14	250	102	70	9	11	F07/F10	13.0
3"	64	200	100	17	14	305	102	70	9	11	F07/F10	20.0

Stainless Steel 3 Way Ball Valve

LV 6400 T & LV 6411 L

Pressure / Temperature Chart

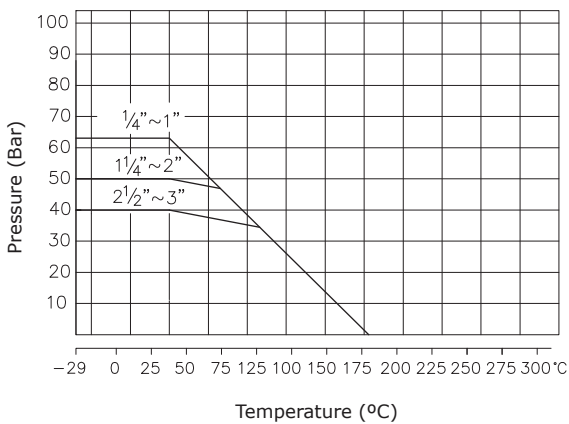

Torque Figures (without Safety)

Size	Nm Open	Nm Close
1/4"	9.0	7.0
3/8"	9.0	7.0
1/2"	9.0	7.0
3/4"	11.7	9.0
1"	16.9	13.0
1 1/4"	28.6	22.0
1 1/2"	36.4	28.0
2"	65.0	50.0
2 1/2"	91.0	70.0
3"	117.0	90.0