

Stainless Steel Gate Valve - Screwed BSPP


Screwed BSPP, CF8M Stainless Steel Body, Bonnet & Wedge, Non-rising Stem, Handwheel Operation



Pressure/Temperature Specifications

Pressure	200psi
Temperature	-29°C to 180°C

Pressure / Temperature Chart

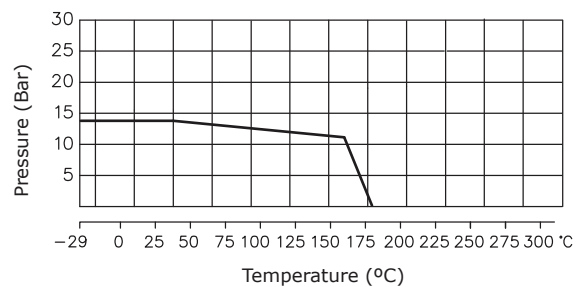

Material Specifications

1. Disc	CF8M Stainless Steel
2. Body	CF8M Stainless Steel
3. Stem	316 Stainless Steel
4. Cap	CF8M Stainless Steel
5. Gasket	PTFE
6. Stop Gasket	304 Stainless Steel
7. Washer	304 Stainless Steel
8. V-ring Packing	PTFE
9. Gland	304 Stainless Steel
10. Cap Nut	CF8M Stainless Steel
11. Handwheel	QT400-18
12. Spring Washer	304 Stainless Steel
13. Handle Nut	304 Stainless Steel

Dimensions

Size	d	L	H	E	Kg
½"	15	55	95	72	0.4
¾"	20	60	97	72	0.5
1"	25	68	118	78	0.75
1¼"	32	76	131	78	1.0
1½"	40	80	156	98	1.45
2"	48	93	170	108	2.1
2½"	65	106	220	126	5.23
3"	80	131	295	150	7.06

