

# Stainless Steel Float Valve - Rated PN10

LV 6750

Screwed BSPP Male, CF8M Stainless Steel Body, Float and Arm



## Pressure / Temperature Specifications


Pressure	PN10
Temperature	-40°C to 100°C

## Material Specifications

Body	CF8M Stainless Steel
Arm	CF8M Stainless Steel
Float	CF8M Stainless Steel
Disc	CF8M Stainless Steel
Disc Seat	Silicone

## Dimensions

R	A	L	H1	H2	Ø Float	Kg
1/2"	35	410	180	375	110	0.31
3/4"	42	490	197	436	160	0.49
1"	45	585	220	521	160	0.55
1 1/4"	52	585	222	520	160	0.73
1 1/2"	60	710	318	651	200	2.8
2"	70	798	324	736	200	3.1
2 1/2"	80	805	390	737	200	3.7
3"	170	1447	493	1248	300	15.8

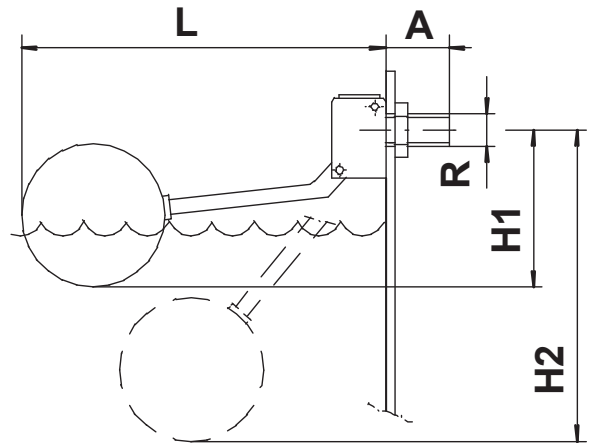

## Flow in Litres/hour

At	1 Bar	2 Bar	3 Bar	4 Bar	6 Bar	8 Bar	10 Bar
1/2"	2,829	3,998	4,895	5,657	6,790	7,978	8,938
3/4"	4,838	6,842	8,370	9,677	11,805	13,993	15,289
1"	6,934	9,919	12,147	14,068	17,167	19,654	21,945
1 1/4"	7,440	10,643	13,034	15,095	18,420	21,089	23,547
1 1/2"	15,556	21,948	26,928	31,104	37,635	43,657	51,516
2"	23,685	33,863	40,977	47,372	45,791	67,532	75,500
2 1/2"	24,869	35,556	43,025	49,740	60,680	70,908	79,275
3"	55,868	79,013	96,783	111,756	136,873	158,047	173,703