



Stainless Steel Float Valve - Flanged PN16

LV 6754

Flanged PN16, Stainless Steel Body, Float & Arm

Pressure / Temperature Specifications	
Pressure	PN10
Temperature	-40°C to 100°C

Material Specifications	
Body	CF8M 316 Stainless Steel
Float	CF8M 316 Stainless Steel
Arm	CF8M 316 Stainless Steel
Seal	Silicone

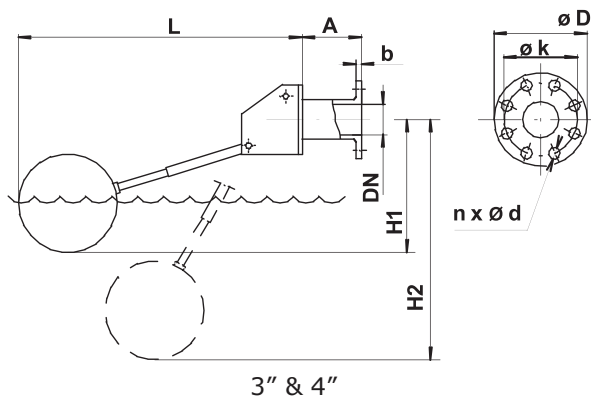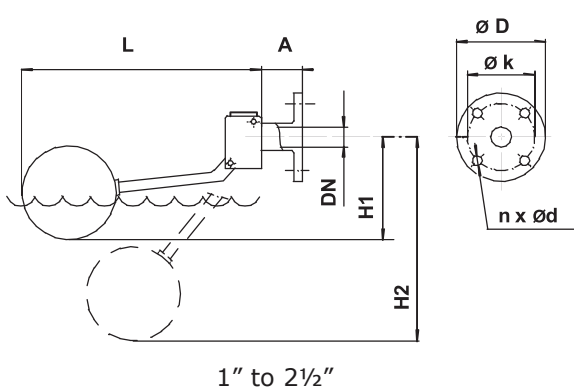

Dimensions											
DN	A	L	H1*	H2	D	k	d	n	b	øFloat	Kg
1"	48	585	174 - 220	521	115	85	14	4	16	160	1.68
1¼"	55	585	164 - 222	520	140	100	18	4	16	160	2.37
1½"	63	710	253 - 318	651	150	110	18	4	16	200	4.68
2"	73	798	255 - 324	736	165	125	18	4	18	200	5.45
2½"	85	805	277 - 390	737	185	145	18	4	18	200	6.75
3"	170	1447	310 - 493	1248	200	160	18	8	20	300	19.8
4"	170	1550	265 - 320	1337	220	180	18	8	20	400	20.6

*This is a guide. The actual measurement is dependant on pressure when closed and the liquid density.