

Stainless Steel Spring Check Valve

Screwed BSPT, Cast CF8M 316 Stainless Steel Body,
316 Stainless Steel Disc & Spring, PTFE Gasket



Pressure / Temperature Specifications


Pressure	PN63
Temperature	-20°C to 200°C

Material Specifications

1. Cap	CF8M Stainless Steel
2. Gasket	PTFE
3. Body	CF8M Stainless Steel
4. Disc	CF8M Stainless Steel
5. Spring	CF8 Stainless Steel

Dimensions

Size	Ød	L	Cracking Pressure	Kg
1/2"	15	58	0.2Mpa	0.17
3/4"	20	68	0.2Mpa	0.24
1"	25	76	0.2Mpa	0.36
1 1/4"	32	89	0.2Mpa	0.51
1 1/2"	40	96	0.2Mpa	0.84
2"	50	108	0.2Mpa	1.2
2 1/2"	65	145	0.1Mpa	2.3
3"	80	160	0.1Mpa	5.2
4"	100	180	0.1Mpa	6.8

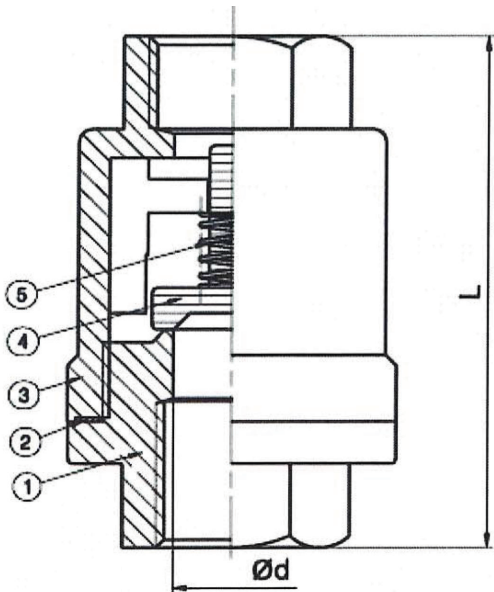

Flow Rate Chart

