

# Automatic Drain System

Screwed BSP, Direct Acting, 2/2 Way, Brass Body, Viton Diaphragm, with Timer and Manually Operated Ball Valve & Filter, 24, 230V AC & 24V DC



## Pressure / Temperature Specifications

|                  |                |
|------------------|----------------|
| Minimum Pressure | 0              |
| Maximum Pressure | 25 Bar (AC)    |
|                  | 24 Bar (DC)    |
| Temperature      | -10°C to 160°C |

## Material Specifications



|                   |                          |
|-------------------|--------------------------|
| 1. Body           | CW617N Brass             |
| 2. Armature Tube  | AISI 303 Stainless Steel |
| 3. Plunger & Core | 430Fr Stainless Steel    |
| 4. Springs        | AISI 302 Stainless Steel |
| 5. Seal           | Viton                    |

## Additional Information

| Size | Orifice | KV       | Coil Type |
|------|---------|----------|-----------|
| 1/2" | 3.0mm   | 0.25m³/h | 3600      |

## Timer Information

| Size | On                      | Off                     |
|------|-------------------------|-------------------------|
| 1/2" | 0.5 - 10 Sec Adjustable | 0.5 - 45 Min Adjustable |

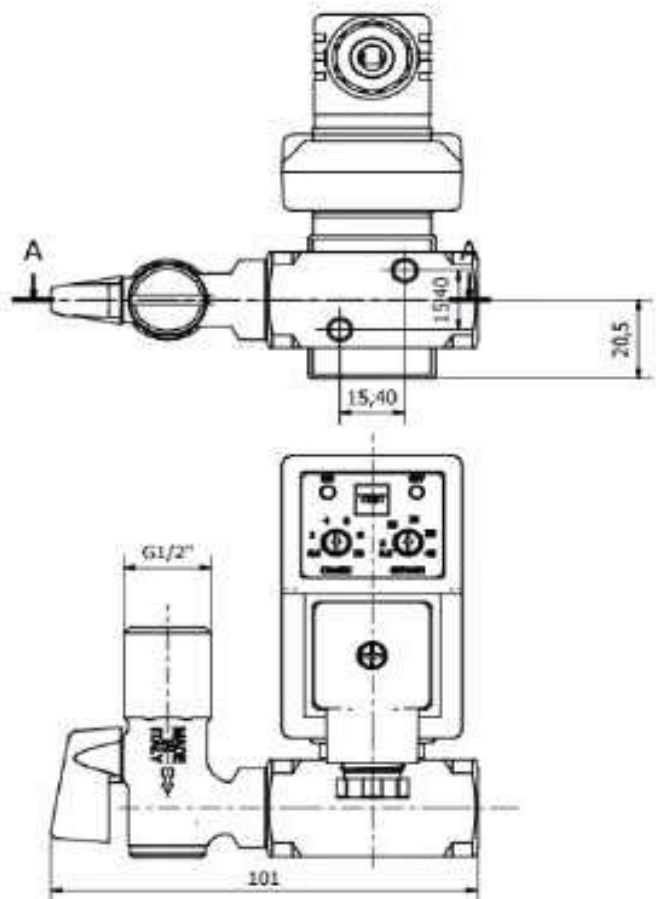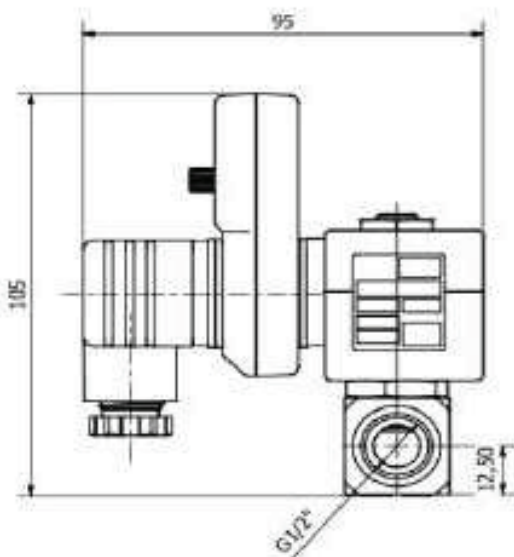

## Coil Information

| Voltage | Width | AC VA Inrush | AC VA Holding | DC Watt | Standard   |
|---------|-------|--------------|---------------|---------|------------|
| 24V DC  | 36mm  | -            | -             | 24      | DIN 43650A |
| 24V AC  | 36mm  | 30           | 24            | -       | DIN 43650A |
| 230V AC | 36mm  | 30           | 24            | -       | DIN 43650A |